


## VR - SCRAP SHEAR (2,5 - 100 TON)

BREAKERS

DEMOLITION TOOLS

CRAWLER DRILLS

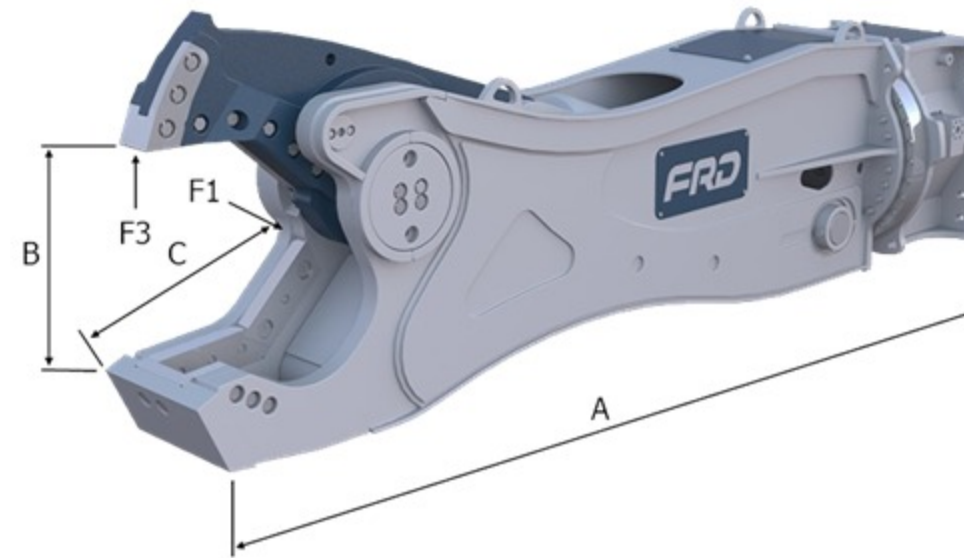

Specifications		VR4ER	VR7ER	VR15ER	VR18ER	VR26ER	VR37ER	VR42ER	VR56ER	VR76ER	VR90ER	VR130ER	VR200ER
A	mm	1855	2080	2277	2665	3227	3726	3744	4338	4436	5355	6300	7000
B	mm	350	415	450	480	575	670	740	830	870	1005	1140	1300
D	mm	348	415	452	480	585	680	740	830	870	1072	1210	1300
F1	kN	1250	2100	2750	4000	6200	7300	8900	10000	12000	13200	14500	17000
F3	kN	320	600	610	950	1460	1650	1950	2400	2400	2770	3550	4600
Round Material	mm	30	40	45	55	65	70	75	85	100	110	140	165
Square Material	mm	25	30	35	40	50	55	60	70	85	90	120	140
Flat Material	mm	6	8	10	15	20	22	25	30	35	40	45	50
IPE-Profile	mm	100	120	200	300	400	420	450	550	600	800	950	1100
H-Profile	mm	70	80	140	200	260	280	320	360	400	550	600	750
Oil Flow (Rotation)	l/min	5-8	5-8	20-30	20-30	20-30	20-30	40-50	40-50	40-50	80-100	80-100	80-110
Operating pressure (Rotation)	Mpa	12	12	12	12	12	12	12	12	12	12	12	15
Rotation		360	360	360	360	360	360	360	360	360	360	360	360
Oil Flow	l/min	70-110	90-140	150-250	200-300	280-350	300-450	350-500	400-600	500-00	700-1000	900-1200	1000-1500
Operating Pressure	Mpa	200-250	280-320	350	350	350	350	350	350	350	350	350	350
Operating Weight	kg	445	760	1210	2120	2930	3760	4650	5960	7570	10000	13500	19400
Excavator (boom top)	t	2-6	5-8	8-14	14-20	20-30	25-38	30-45	40-60	45-80	65-90	85-110	105-120
Excavator (stick)	t	5-8	8-14	13-20	19-28	27-38	30-45	38-55	50-70	65-110	95-120	120-145	-

Specifications subject to change without notice