


V SYSTEM - MULTIPLE USE CRUSHER (3,5 - 70 TON)

BREAKERS

DEMOLITION TOOLS

CRAWLER DRILLS

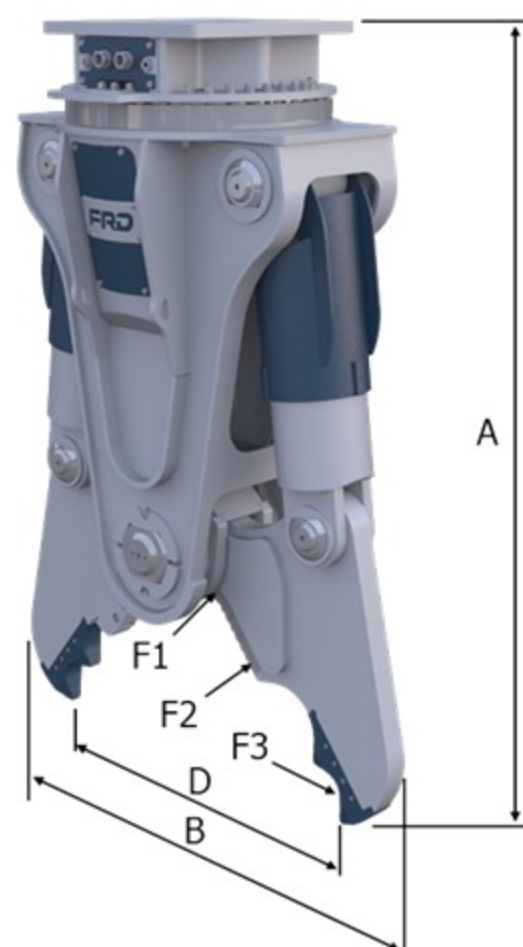

Specifications		V4	V6	V11	V17	V22	V26	V34	V44	V50
A	mm	1140	1390	1620	1930	2080	2260	2470	2720	2970
B	mm	770	755	910	1110	1200	1500	1700	1740	2020
D	mm	372	545	670	750	860	1130	1230	1300	1550
F1	kN	620	1000	1750	2000	2500	3350	3600	3900	4200
F2	kN	320	750	1050	1250	1500	2050	2180	2450	2650
F3	kN	250	500	700	800	1000	1300	1400	1550	1700
Cutter Length	mm	84	150	150	150	200	200	300	300	300
Round Material	mm	15	20	25	30	35	40	45	50	50
Oil Flow (Rotation)	l/min	5 - 8	5 - 8	5 - 8	20 - 30	20 - 30	20 - 30	40 - 50	40 - 50	40 - 50
Operating Pressure (Rotation)	Mpa	12	12	12	12	12	12	12	12	12
Oil Flow	l/min	30-50	70-110	90-140	150-200	170-210	250-300	300-350	350-450	400-500
Operating Pressure	Mpa	22	22 - 35	35	35	35	35	35	35	35
Operating Weight	kg	262	510	795	1150	1485	1735	2400	3535	3936
Base Machine Weight	t	3 - 6	5 - 11	10 - 15	15 - 22	21 - 28	25 - 35	33 - 50	44 - 60	50 - 70

Specifications subject to change without notice

Primary Jaw (P)		V4 P	V6 P	V11 P	V17 P	V22 P	V26 P	V34 P	V44 P	V50 P
Opening width	mm	374	545	670	754	862	1130	1248	1308	1547
Cutter Length	mm	305	385	445	583	623	709	824	845	944
Round Material	mm	15	20	25	30	35	40	45	50	50

Specifications subject to change without notice

Secondary Jaw (S)		V4 S	V6 S	V11 S	V17 S	V22 S	V26 S	V34 S	V44 S	V50 S
Opening width	mm		437	544	604	664	911	1042	1064	1123
Cutter Length	mm		84	84	150	150	150	150	200	200
Round Material	mm		20	25	30	35	40	45	50	50

Specifications subject to change without notice

Combi Jaw (M)		V4 M	V6 M	V11 M	V17 M	V22 M	V26 M	V34 M	V44 M	V50 M
Opening width	mm		508	642	707	861	1111	1234	1302	1372
Round Material	mm		20	25	30	35	40	45	50	50
IPE-Profile	mm		100	120	160	240	270	330	400	550
H-Profile	mm		50	70	120	180	220	240	260	280

Specifications subject to change without notice

Steel Jaw (C)		V4 C	V6 C	V11 C	V17 C	V22 C	V26 C	V34 C	V44 C	V50 C
Opening width	mm	174	229	297	344	413	576	611	663	743
Round Material	mm	30	30	35	40	50	60	65	70	80
IPE-Profile	mm		120	140	180	270	330	330	450	500
H-Profile	mm		70	100	140	200	240	260	300	320

Specifications subject to change without notice

Tank Jaw (T)		V4 T	V6 T	V11 T	V17 T	V22 T	V26 T	V34 T	V44 T	V50 T
Opening width	mm				300	325	420	454	482	511
Thickness	mm				10	15	20	25	30	35

Specifications subject to change without notice

Wood Jaw (W)		V4 W	V6 W	V11 W	V17 W	V22 W	V26 W	V34 W	V44 W	V50 W
Opening width	mm		476	562	708	754				
Jaw Depth	mm		436	436	641	641				

Specifications subject to change without notice